Service
Service
Service

Service Manual

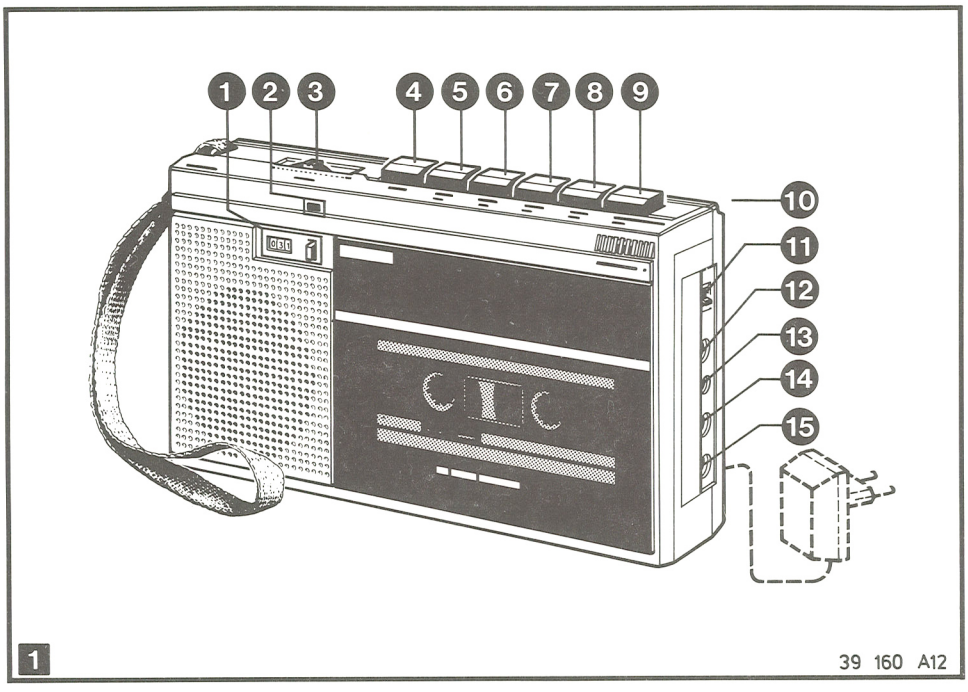

1 Tape counter
2 REC battery indication
3 Volume
4 Pauze
5 Stop-eject
6 Fast forward
7 Rewind
8 Play
9 Record
10 Mice
11 Voice actuation switch
12 Mice-input
13 Remote control
14 Earphone
15 D.C. 6 V

Documentation Technique Service Dokumentation Documentazione di Servizio Huolte-Ohje Manual de Servicio Manual de Serviço

"Pour votre sécurité, ces documents doivent être utilisés par des spécialistes agréés, seuls habilités à réparer votre appareil en panne".

Subject to modification
4822 725 20903
Printed in The Netherlands
©Copyright reserved

PHILIPS
Published by
Service Consumer Electronics

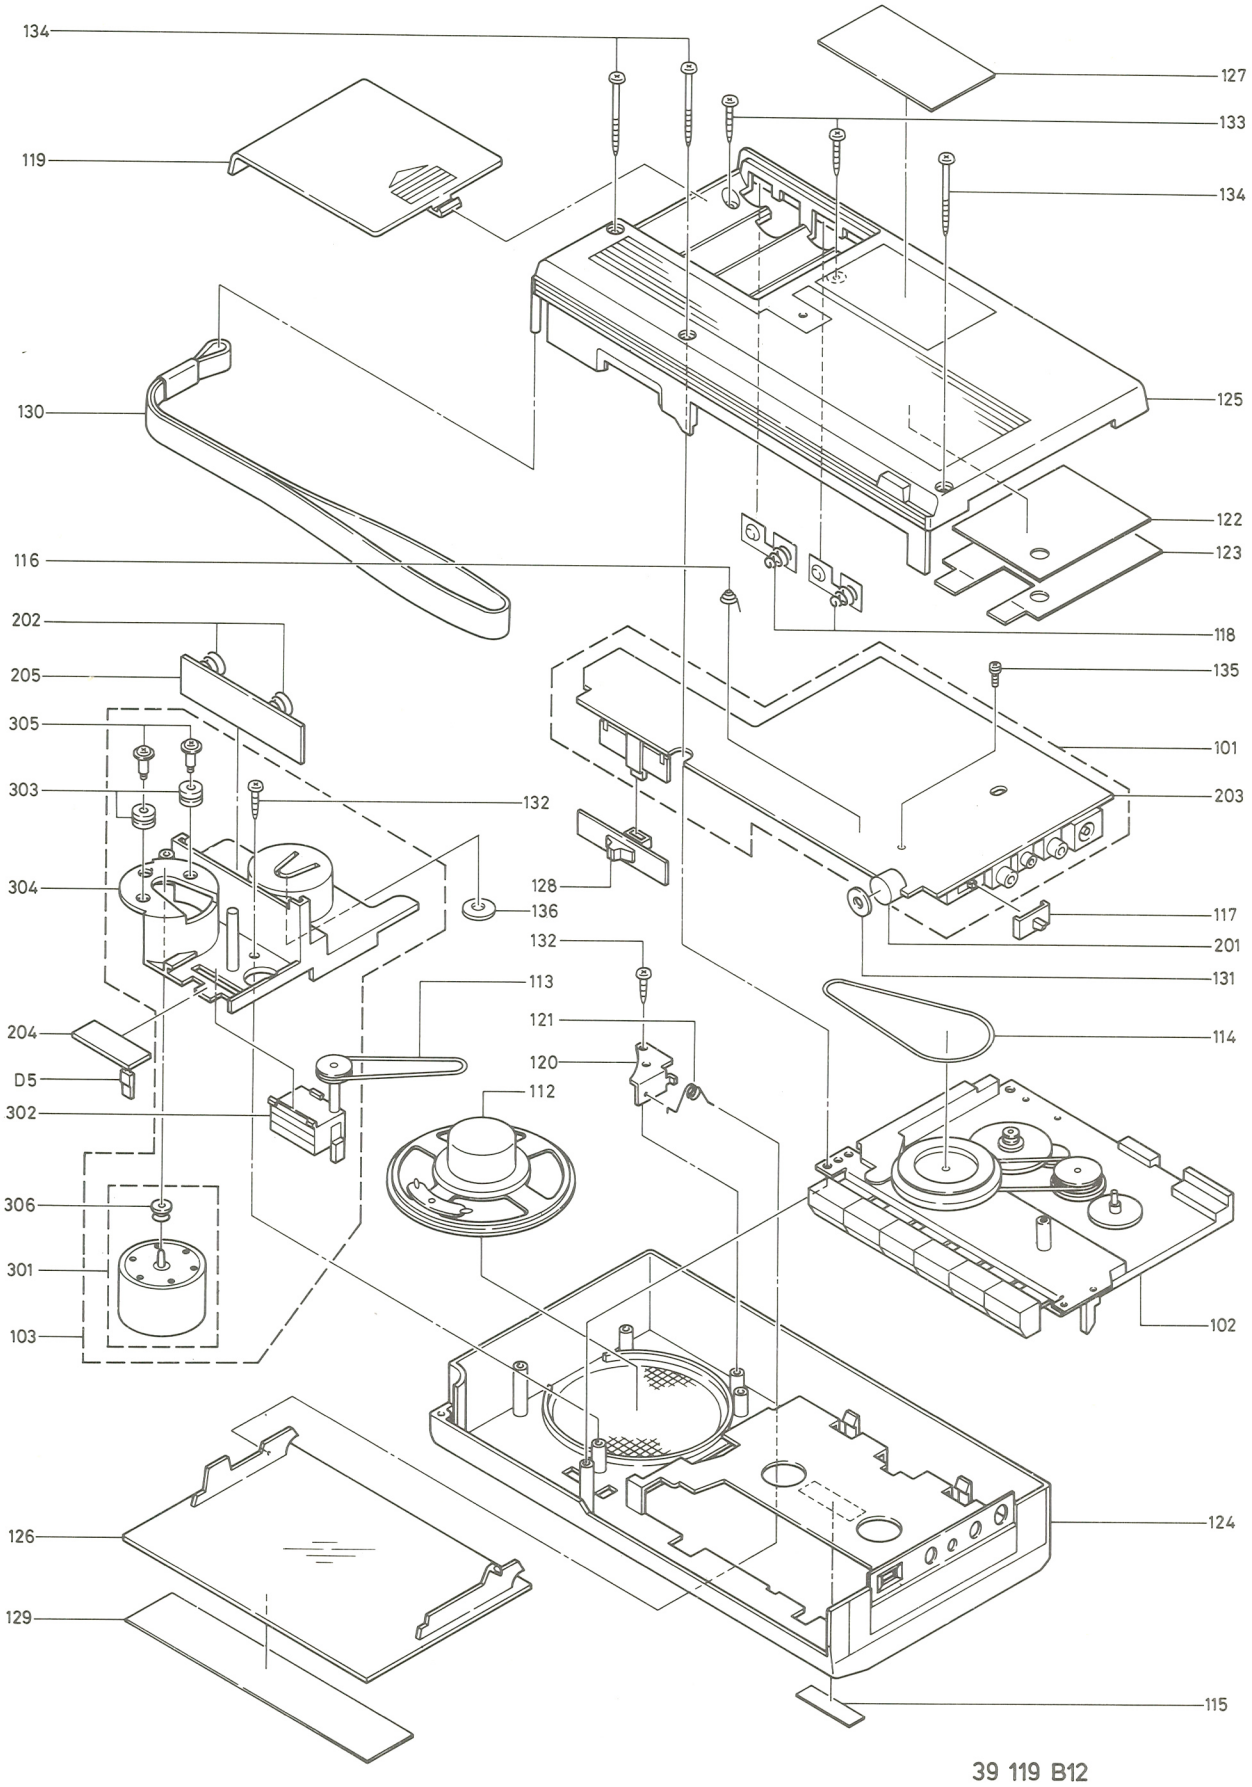

39 119 B12

112	4822 240 30399	124	4822 443 50864
113	4822 358 30676	125	4822 443 50865
114	4822 358 30675	126	4822 443 61769
117	4822 411 61208	130	4822 498 30128
119	4822 443 61768	301	4822 361 20663

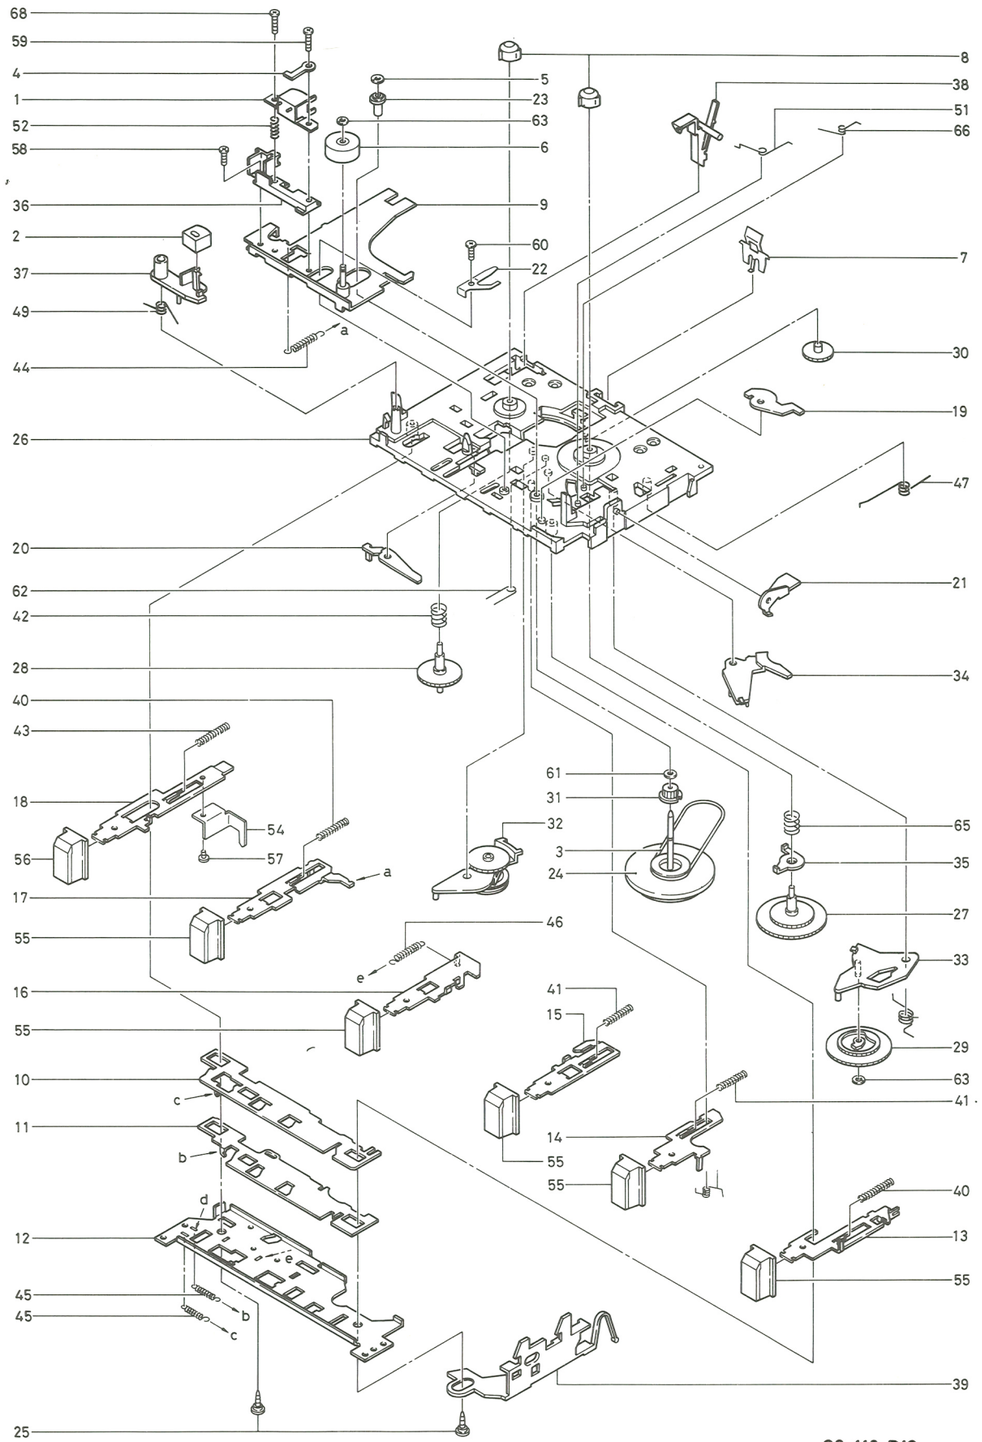

39_118 B12

1	4822 249 10317		
2	4822 249 40215		
3	4822 358 30431	27	4822 528 20459
6	4822 528 90561	55	4822 410 25016
24	4822 528 60302	56	4822 410 25015

CS 1 677

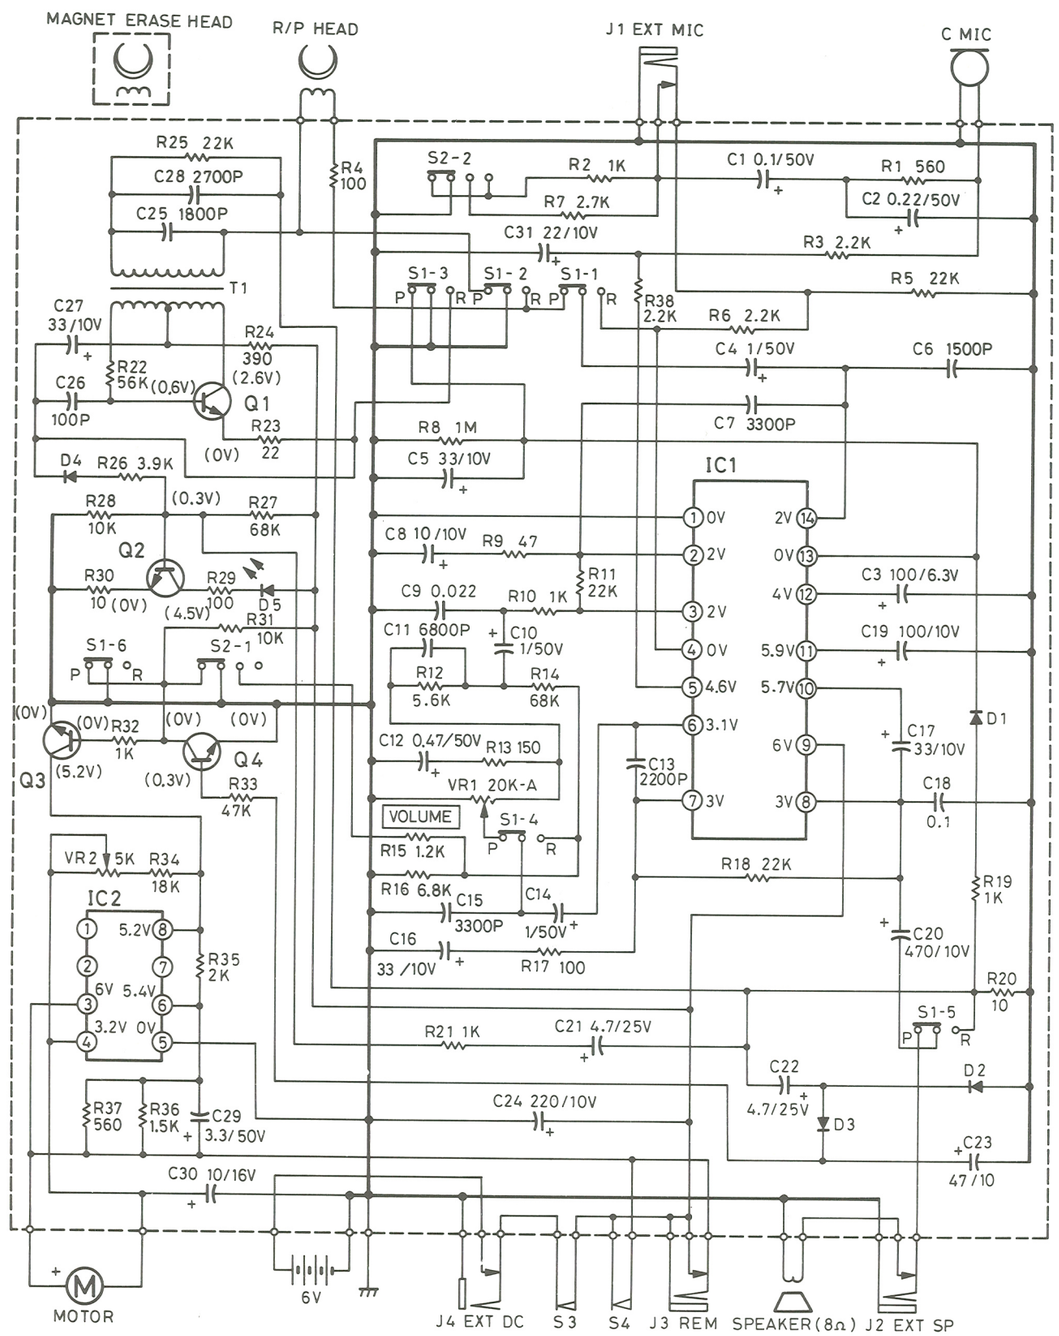

IC1 ----μPC1350C
IC2 ----NJM2606D

Q1~4 ---2SC2458-GR, 2SC2785E or F

D1,2 ----1S1588 or DS442
D3,4 ----1N60P
D5 ----TLR208

S1 -- RECORD PLAYBACK SWITCH (PLAYBACK POSITION)
S2 -- VOICE ACTION SWITCH (OUT POSITION)
S3 -- TAPE ON OFF SWITCH (OFF POSITION)
S4 -- FF/REWIND SWITCH

NOTES;
1. ALL RESISTANCE VALUES ARE IN Ω. K=1000Ω M=1000KΩ
2. ALL CAPACITANCE VALUES ARE IN μF. P=10^{-6}μF
3. ALL RESISTORS ARE 1/6 WATT, UNLESS OTHERWISE SPECIFIED.
4. VOLTAGES MEASURED FROM POINT INDICATOR TO CHASSIS GROUND WITH V.T.V.M AT LINE VOLUME CONTROL MINIMUM AND NO SIGNAL.

(SPECIFICATIONS AND CIRCUITS SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.)

39 120 B12

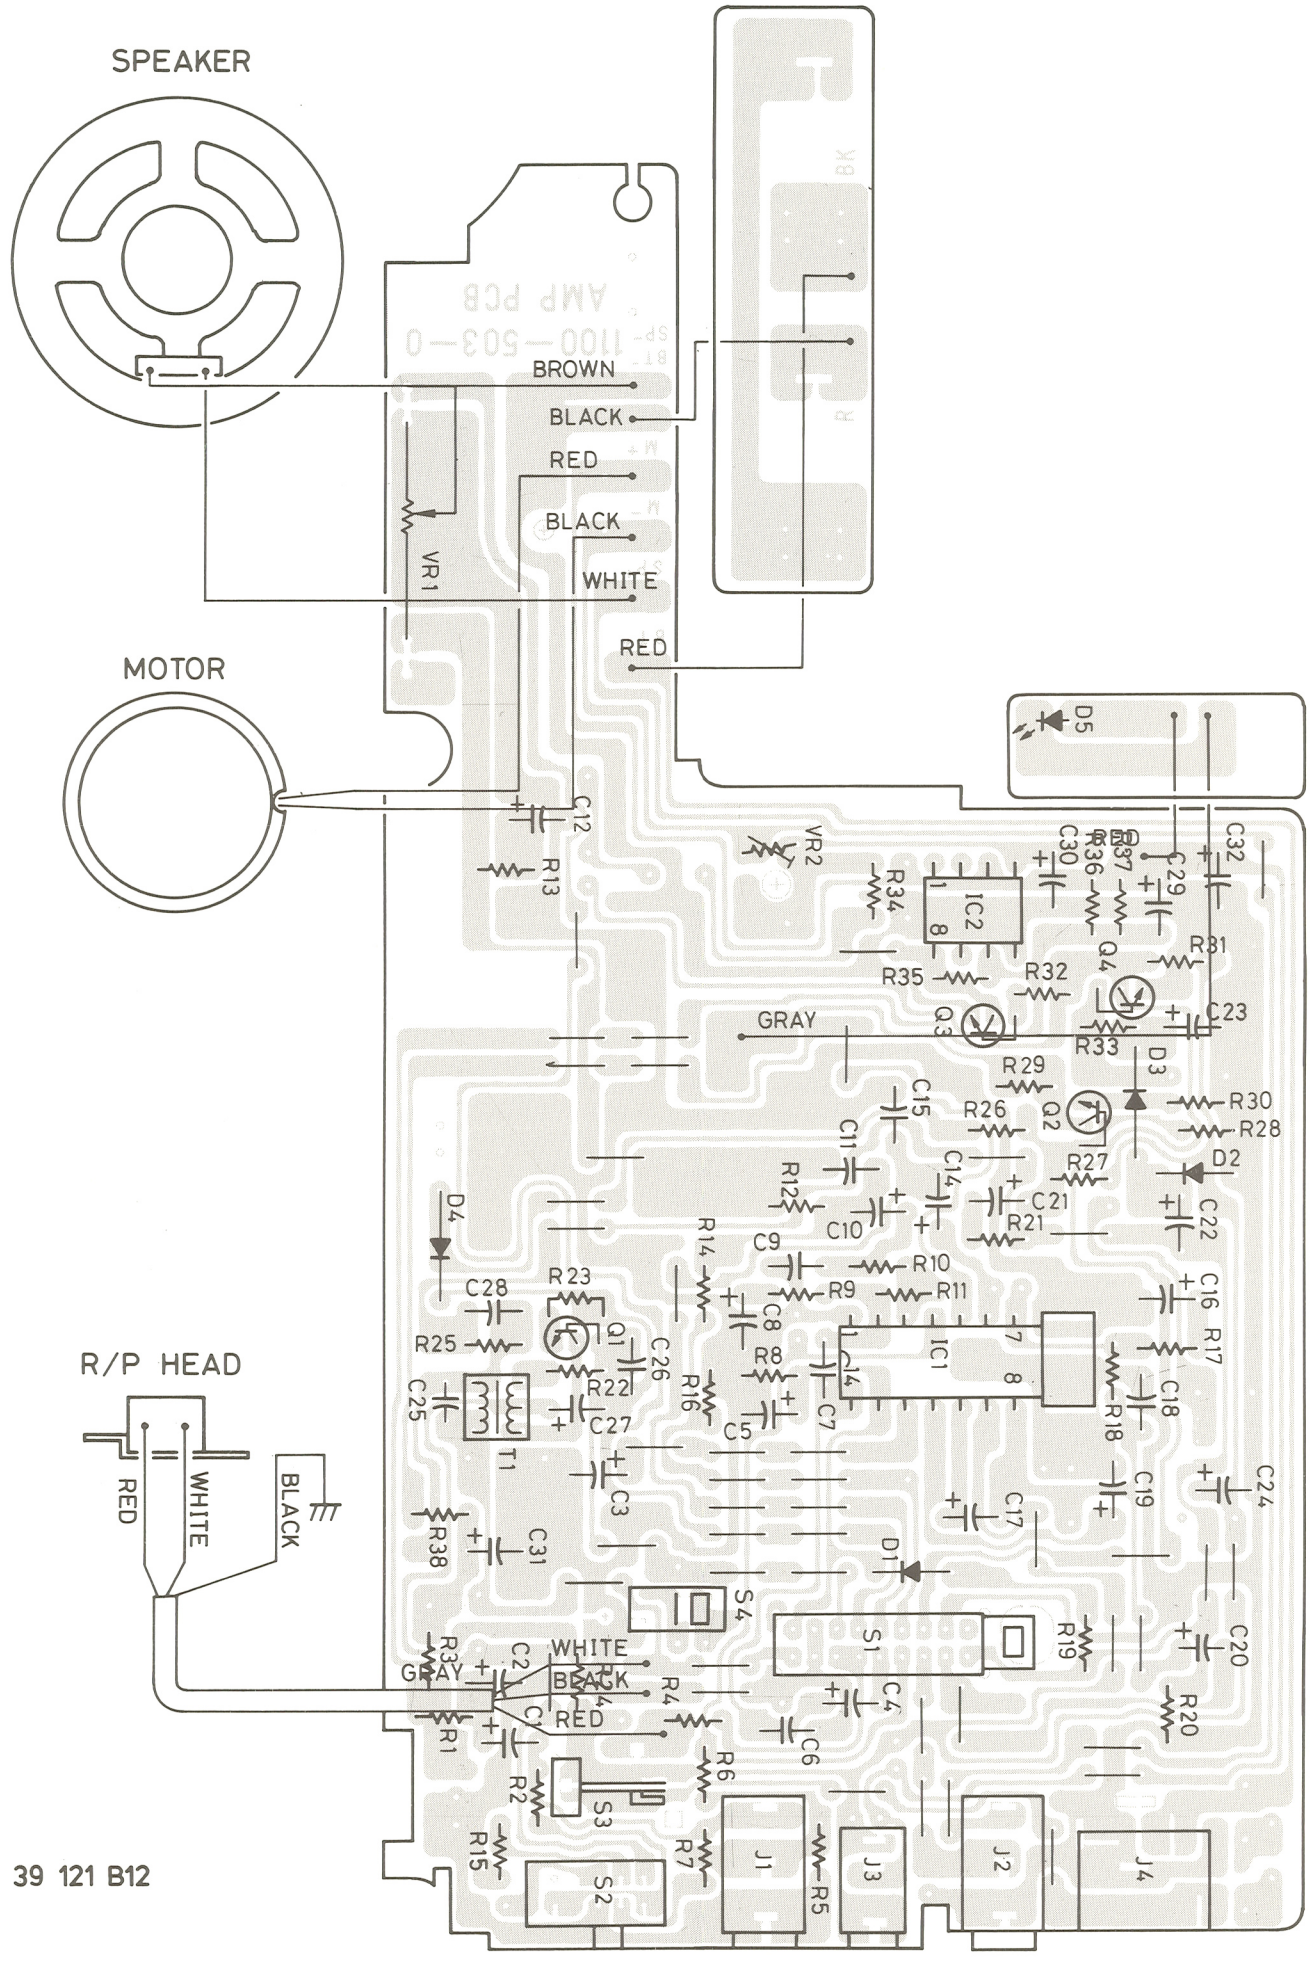
SPEAKER
MOTOR
R/P HEAD
BROWN
BLACK
RED
BLACK
WHITE
RED
VR1
VR2
GRAY
WHITE
BLACK
RED
RED
WHITE
BLACK
IC1
IC2
T1
S1
S2
S3
S4
J1
J2
J3
J4
D1
D2
D3
D4
D5
Q1
Q2
Q3
Q4
39 121 B12

D1, D2	1S1588	4822 130 31537
D3, D4	1N60P	4822 130 30869
D5	LED TLR208	4822 130 31911
IC1	µPC1350C	4822 209 80778
IC2	NJM2606D	4822 209 83293
Q1-Q1	1SC2458-G	4822 130 42077

Miscellaneous

J1-J2	Jack 3.5 mice, speaker	4822 267 30735
J3	Jack 2.5 remote	4822 264 30135
J4	Ext. D.C.	4822 267 30736
S1	Record play	4822 277 21065
S2	Voice actuation	4822 277 21066
S3	Tape on/off	4822 276 11881
S4	FF/Rewind	4822 276 11882
VR1	20k volume	4822 105 10834